

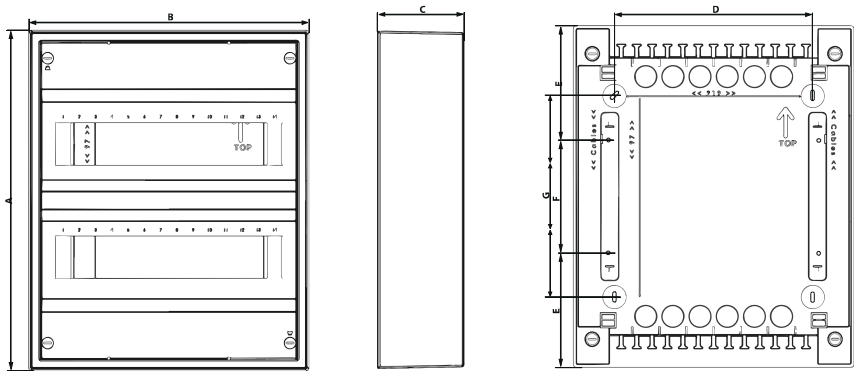


GP

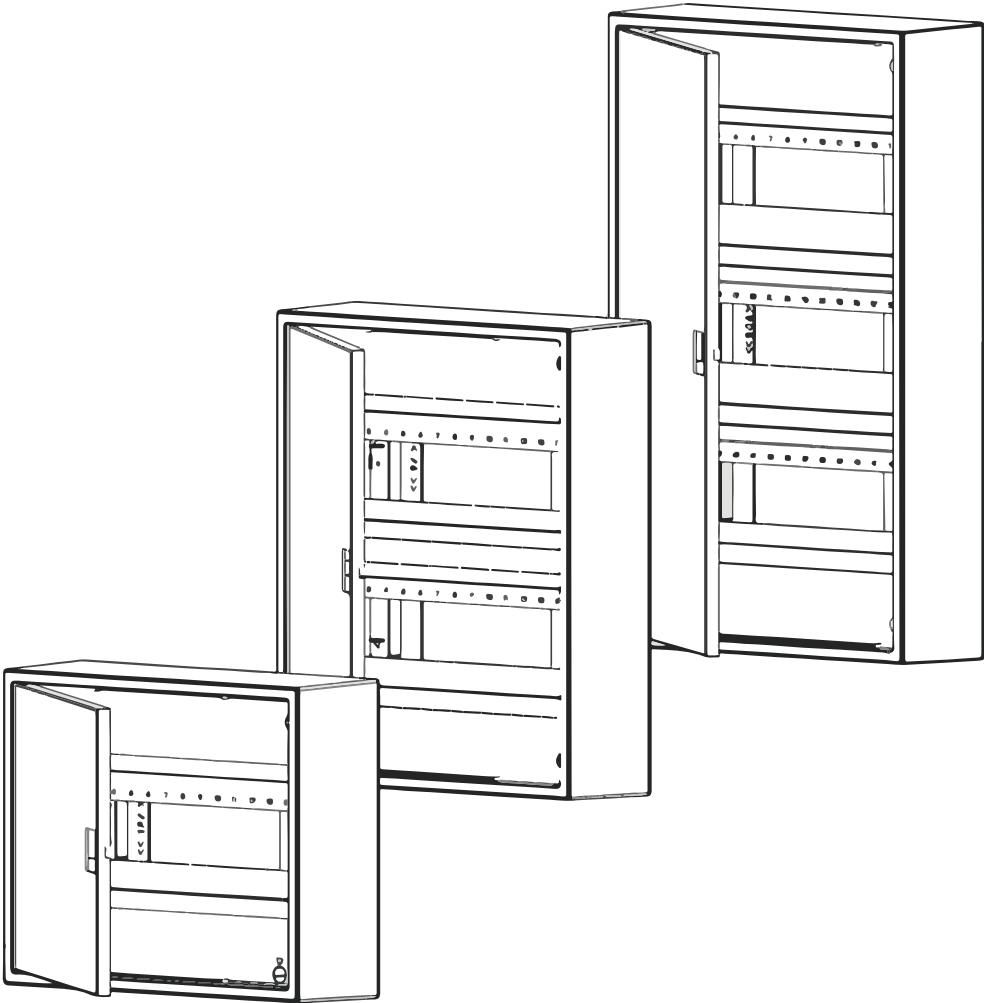

	A	B	C	D	E	F	G	Pde
7012124030198	251 mm	312 mm	97 mm	125 mm	126 mm	125 mm	126 mm	30W
7012244030198	376 mm	312 mm	97 mm	223 mm	126 mm	125 mm	126 mm	40W
7012364030198	501 mm	312 mm	97 mm	125 mm	126 mm	125 mm	126 mm	50W

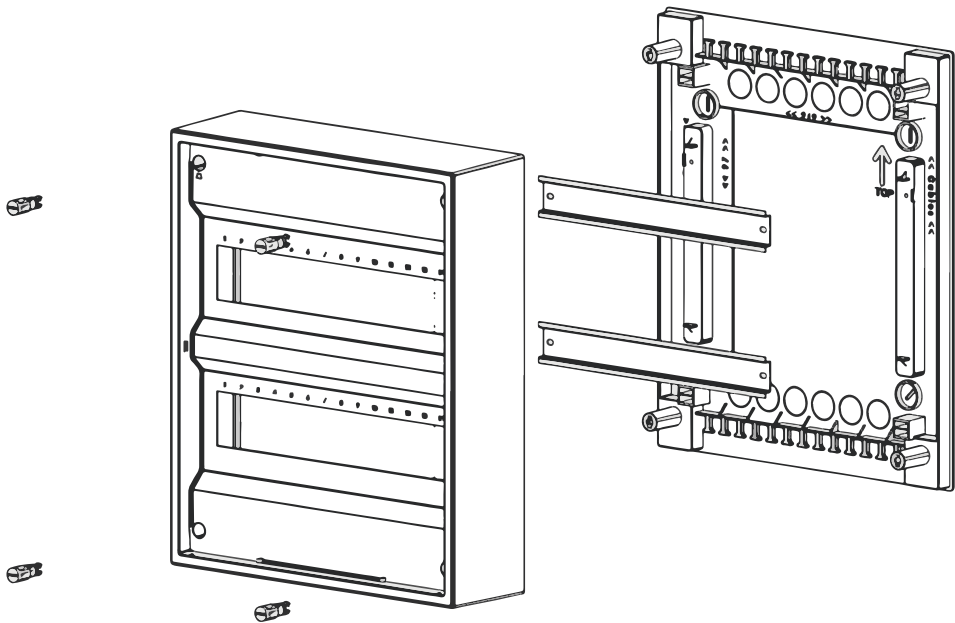

Temperature range: -25°C....+60°C,Rating voltage AC400V,According to: IEC60670,IK07

