

TM TECHNOLOGIE
emergency & evacuation lighting

IP 65 LED 3h 850 °C

210 ÷ 250 V AC
50 / 60 Hz
186 ÷ 254 V DC

10 ÷ 40 °C
COLD
-15 ÷ +5 °C
0 ÷ 40 °C
35 ÷ 45 °C
CBA
-10 ÷ +40 °C


0.4 m

EAC CNBOP-PIB


05 CE

iTECH

A






B

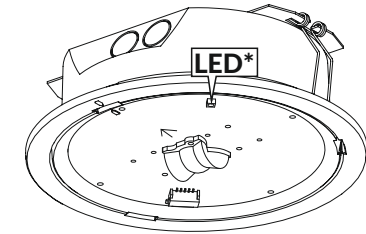



CBA, CBM, D2, D3, D2R, D3R, DA, DL

! CBA = CB3

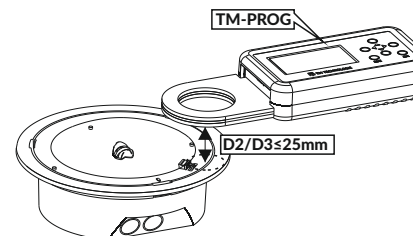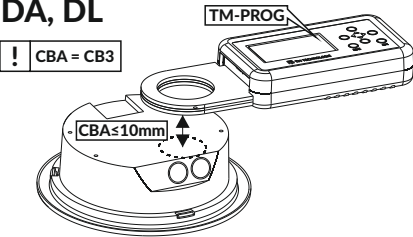


! ±1 [mm]

! **B

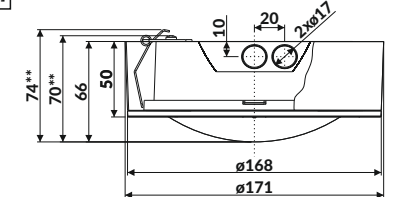


1

1.1



1.2



! LiFePO4/C 3.2V/1.5Ah

4.5

4.6*

4.7

iTECH	M	NM	CB
t _c [°C]	95	76	78

iTECH	CBA
t _c [°C]	84

iTECH	M6
t _c [°C]	94

iTECH	1 LED	2 LED
t _c [°C]	57	57

iTECH	CB+, CBM
t _c [°C]	80

! CB = CB1
! CBA = CB3



