


TM.PRIMO A M2 CBM



Catalog number	TM-A0.M2.CBM1W
Application	anti-panic lighting
Duration time	-
Operating mode	-
Version	for central battery
Colour	RAL9003
Luminous flux	725 lm
Maximum light power (the luminaire can power the light source with a different power)	5.9 W
Active power	* W
Power supply	210+250 V AC
Power supply CB	186+254 V DC
Dimming mode	no
Temperature range	-15-55 °C
Material	Metal
Appliance classes	1
IP	IP20
IK	IK03
LED Lifetime	50 000 work hour
finish	mirror stainless steel black steel powder coated: RAL 9003 - white RAL 9005 - black

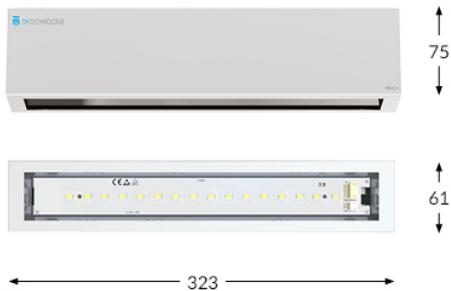